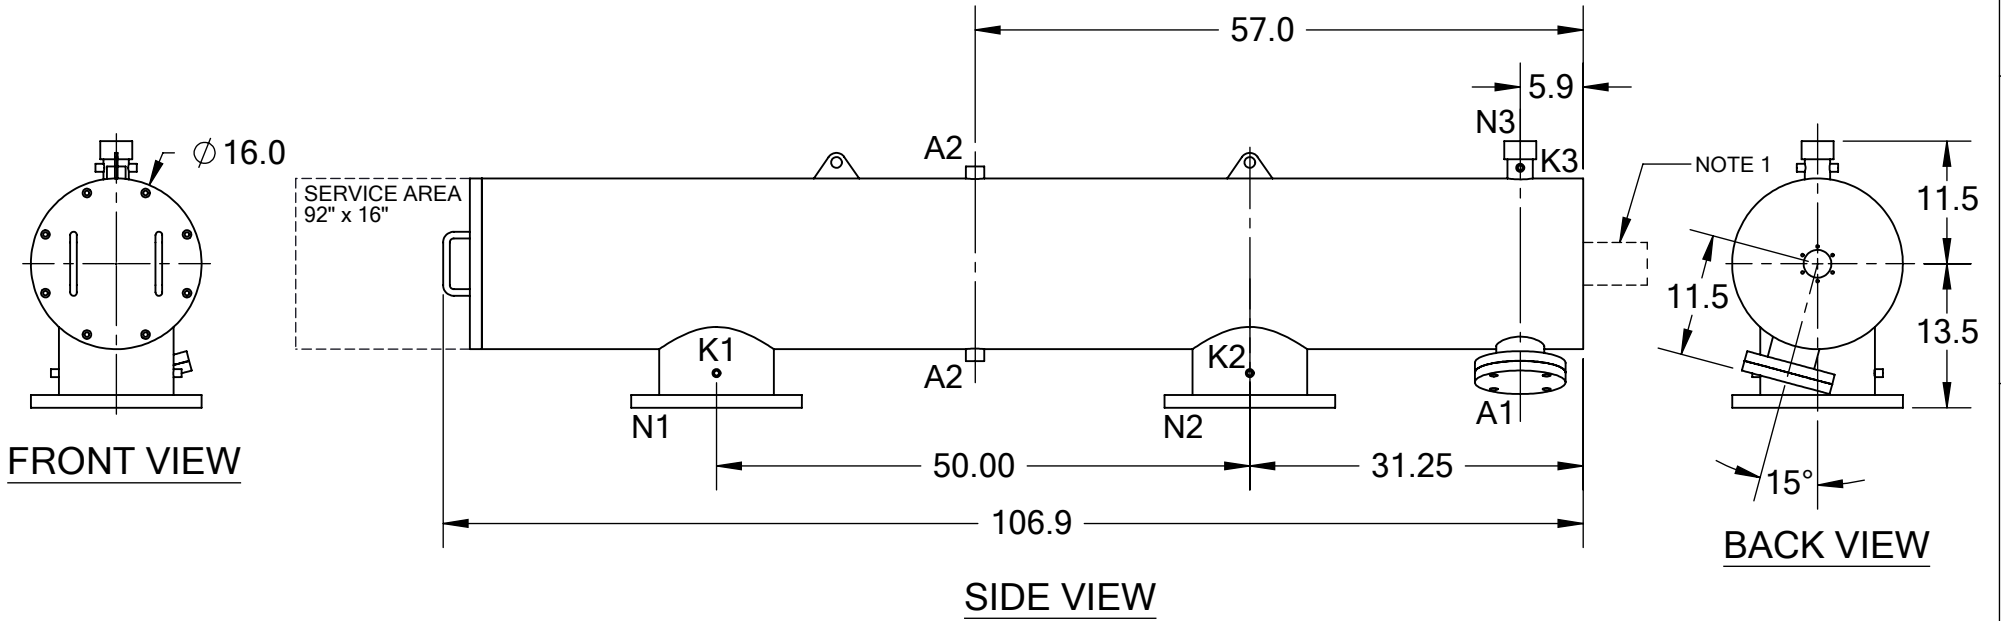


REVISIONS				
REV.	ZONE	DESCRIPTION	DATE	INITIAL
1	1B, 2B	CHANGED "WORKING" TO "DESIGN" & TEMPERATURE FROM 200°F TO 160°F IN TECHNICAL DATA TABLE.	09/27/12	S.P.
2	7D	ADDED NOTE 1	10/17/14	M.S.





TECHNICAL DATA

FLOW RATE	MAX. 2,630 GPM (597 m ³ /hr)
SCREEN SIZE	____ MICRON
SCREEN AREA	11.0 SQ. FEET
DESIGN TEMPERATURE	160 °F
DESIGN PRESSURE	150 PSI
EMPTY WEIGHT	~650 LBS.
FULL WEIGHT	~1,400 LBS.

NOTES:

- PLEASE ALLOW ~20" ADDITIONAL TO INSTALL AND REMOVE THE PISTON ASSEMBLY TO THE BACKSIDE OF THE FILTER.

NOZZLE	CONNECTION	TYPE	SIZE	RATING	TOLERANCES (UNLESS OTHERWISE SPECIFIED)		 2672 S. LA CIENEGA BLVD. LOS ANGELES, CA 90034 MAIN: (310) 839-2828 FAX: (310) 839-6878	
A1	SERVICE PORT	FLANGED	3.5" ASA	CL. #150 F.F. w/ Blind	FRAC. ±1/16	ANGLE ±1°		
A2	PRESSURE RELEASE	THREADED	1" NPT(2)		.X ±.1			
K1	HIGH PRESSURE CONN.	THREADED	1/4" NPT(2)	CLASS #150 F.F.S.O. CLASS #150 F.F.S.O.	.XX ±.05	MATERIAL: SST		
K2	LOW PRESSURE CONN.	THREADED	1/4" NPT(2)		.XXX ±.010			
K3	HYDRAULIC CONN.	THREADED	1/4" NPT(2)		DRAWN BY: S. PERKINSON		TITLE: ABW10-LP FILTER, CUT DRAWING	
N1	INLET	FLANGED	10" ASA		DATE: 07/06/11	DRAWING NUMBER		REV
N2	OUTLET	FLANGED	10" ASA		SCALE: 1:18	SHEET: 1 OF 1	ABW-10LP-CUT-01	2
N3	FLUSH OUTLET	THREADED	2" NPT					