


1 2 3 4 5 6 7 8

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

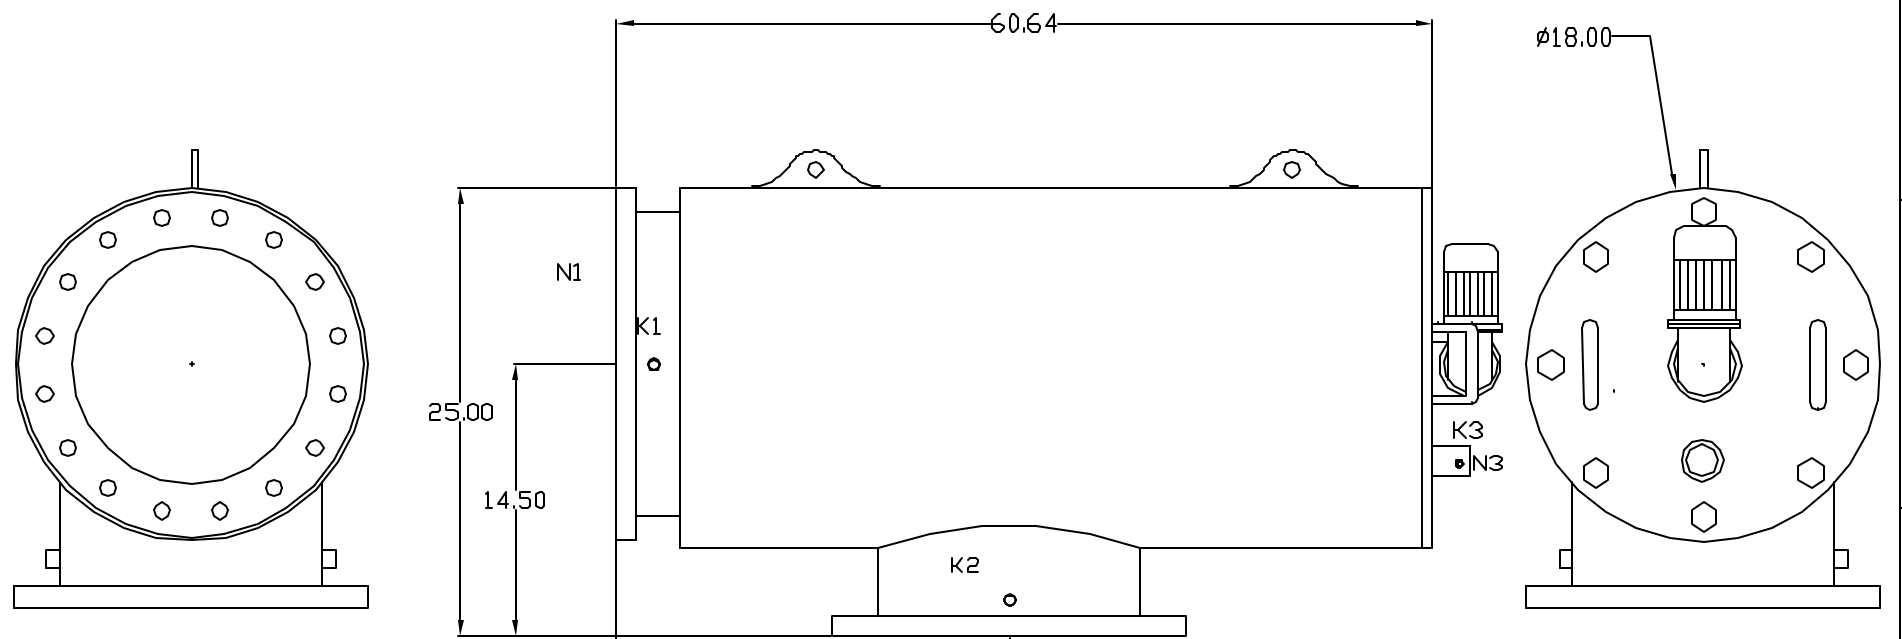

TECHNICAL DATA

Flow Rate Max. 4000 GPM  
 Screen Size \_\_\_\_\_ Micron  
 Screen Area 12.5 sq.ft  
 Working Temp. 200 deg. F  
 Working Pressure 150 PSI  
 Empty Weight \_\_\_ lbs.  
 Full Weight \_\_\_\_\_ lbs.

NOZZLE	CONNECTION	TYPE OF CONNECTION	SIZE	RATING
K1	Hi. Press. Conn.	Threaded	1/4" NPT(2)	
K2	Low Press. Conn.	Threaded	1/4" NPT(2)	
K3	Hydraulic Conn.	Threaded	1/4" NPT(2)	
N1	Inlet	Flanged	14" ASA	150 lbs. F.F.
N2	Outlet	Flanged	14" ASA	150 lbs. F.F.
N3	Flushoutlet	Threaded	2" NPT	

UNLESS OTHERWISE SPECIFIED  
 DIMENSIONS ARE IN INCHES  
 TOLERANCES  
 DECIMALS ANGULAR  
 XX ± .05 ± 0.5 DEG  
 XXX ± .01

AUTOMATIC FILTERS, INC.  
 2672 S. LA CIENEGA BLVD.  
 LOS ANGELES, CA 90034  
 (310) 839-2828 FAX (310) 839-6878

TITLE  
 CSB 14  
 Coarse Screen Brush  
 Filter

DRAWN Daniel Stenberg	DATE 2-22-06	SIZE A	DWG NO. CSB14	REV 0
CHECKED		NOT SCALE	SHEET	OF